


FEATURED CONFIGURATION / CPX-ARE

Anchor-Rod Auxiliary Eye

An additional guy attachment point for an existing anchor rod. The two-clamp arrangement is selected against the actual rod and assembly geometry.

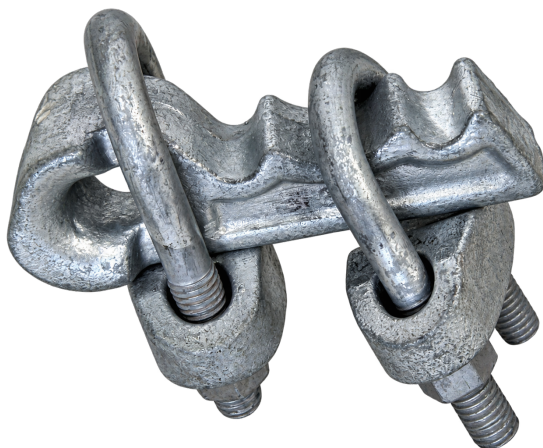

CPX-ARE	Configuration reference
Assembly	Integral eye, two U-bolt clamps and four hex nuts
Body and saddles	QT450
U-bolts and nuts	Q235
Finish	Galvanized
Overall length	Approximately 130 mm (5.1 in)
U-bolt center spacing	49 ±1.3 mm
Weight	1.55 kg

Dimensions are after galvanizing. Confirm rod diameter, clamp fit and the required load/test criteria before specifying the final assembly. No interchangeable-fit or working-load claim is established here.