


FEATURED CONFIGURATION / CX-31 SERIES

Fiber Interface and Slack Storage

Termination, splice protection and cable slack management at the transition to customer premises.

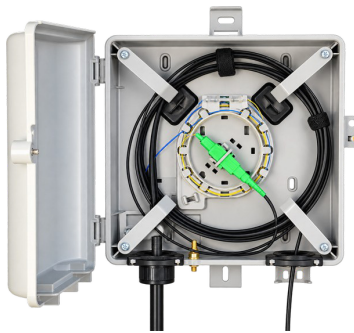

Specification	Details
Adapter interfaces	SC/APC, SC/UPC, LC/APC or LC/UPC
Port configurations	1, 2, 4, 6 or 12 ports; up to 24 ports with LC adapters
Slack storage	Up to 50 ft (15.2 m); capacity depends on cable configuration
Splice methods	Fusion or mechanical splicing
Cable routing	Rear-entry grommets, corner retention and tie-down points
Configuration options	Cable-entry clamp; internal or external grounding options
Closure	3/8-inch hex bolt; security-seal provision

Established order references

Part number	Configuration
CX31-01-01-01-N	1-port SC/APC
CX31-01-01-02-N	2-port SC/APC
CX31-02-01-06-N	6-port SC/APC
CX31-04-01-12-N	12-port SC/APC

Specify adapters, cable grommets and grounding. Storage capacity depends on cable diameter and permitted bend radius.